
Stock Top Running Crane Kits



- 5T & 10T WRIGHT[®] top running endtrucks available
- Package with a deck mounted hoist for a Top Running Trolley Hoist!

All stock top running crane kits feature:

- Bolted girder connection plates
- Double flanged wheels for A.S.C.E rail (flat tread wheels available for square bar applications)
- Dual single speed drives
- Adjustable AC disc brakes
- · Variable speed controls
- Rubber bumpers
- Rail Sweeps

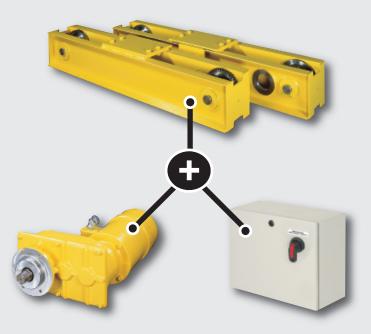

WRIGHT[®] top running crane kits are stocked with variable speed motion. Endtrucks feature dual crane drives, AC motor brakes, US manufactured motors, girder connection mounting plates, hardened double flanged wheels with tapered treads for A.S.C.E. rail, rubber bumpers, and rail sweeps. Controls include VFD, 100 VA control transformer, mainline contactor, fuse block (less fuses), 100 VA transformer, all in a NEMA 12 enclosure with a 30 amp through the door manual disconnect switch and are for either 230-3-60 or 460-3-60.

WRIGHT® STOCK CRANE COMPONENT KITS AVAILABLE:

CRANE KIT NUMBER	ENDTRUCK MODEL NUMBER	CAP (TONS)	SPAN (FT)	TRAVERSING SPEED (FPM)	RAIL SIZE	MAX TRUCK LOAD (LBS)	CMAA DUTY	POWER SUPPLY
T52VF752	4300650	5T	50'	75/25	30# - 40#	18,000	С	230/3/60
T52VF754	4300650	5T	50'	75/25	30# - 40#	18,000	С	460/3/60
T52VF1102	4300650	5T	50'	110/37	30# - 40#	18,000	С	230/3/60
T52VF1104	4300650	5T	50'	110/37	30# - 40#	18,000	С	460/3/60
T101VF752	4300660	10T	35'	75/25	40# - 80#	28,600	С	230/3/60
T101VF754	4300660	10T	35'	75/25	40# - 80#	28,600	С	460/3/60
T101VF1102	4300660	10T	35'	110/37	40# - 80#	28,600	С	230/3/60
T101VF1104	4300660	10T	35'	110/37	40# - 80#	28,600	С	460/3/60

Available Options:

Flat Tread Wheels

- Max. 2" Square Bar for 5T Trucks
- Max. 2-1/2" Square Bar for 10T Trucks

Top Running Trolley Hoist Kit Pricing with Hoist & Trolley Controls



Call 800-568-5657 to order today!

URIGHT[°] Hoists are the best choice for high volume, heavy lifting.



Capacities of 1 to 5 tons. Long lifts up to 107 feet. High speeds up to 40 FPM.



Standard features include:

- H-4 Duty classification (ASME HST-4M)
- · Mechanical load brake
- · U.S. manufactured motors
- · Disc type motor brake
- Motor thermostats
- · Machine cut, case hardened, alloy steel gears
- · Largest oil bath in the industry
- · Easy maintenance of gears
- · Machined steel sheaves

Heavy-Rated

Hoists without Mechanical Load Brake. Capacities up to 100 tons



Standard features include:

- Two speed hoist and VFD trolley
- · Upper and lower limit switch
- Wire rope guide
- Thermal overload protection and more!



ACCO Material Handling Solutions

76 Acco Drive, Box 792, York, PA 17405-0792 717-741-4863, 800-967-7333, FAX 800-715-8897 E-mail: info@accomhs.com www.accomhs.com



IRK-RA

Capacities of 1 to 25 tons. Long lifts up to 206 feet. High speeds up to 44 FPM.



Top Running Trolley Hoist

Cross Mount

Standard features include:

- H-4 Duty Classification(ASME HST-4M)
- · Mechanical load brake
- · U.S. manufactured motors
- · Disc type motor brake
- Motor thermostats
- · Machine cut, case hardened, alloy steel gears
- · Largest oil bath in the industry
- · Easy maintenance of gears
- · Machined steel sheaves
- · Overload cutoff



Hook Suspension and Motorized Trolley Electric Chain Hoists.

Standard features include:

- Mechanical load brake
- · Heavy-Duty hoist motor
- Disc type motor brake
- · Helical and spur gears
- Upper and lower limit switch
- Overload alarm
- Push button pendant
- Case hardened load chain
- · Forged carbon steel swivel hook
- Chain container

